



Type	Value
Max Weight	26kg / 57lb
IP Class	IP20
UL Class	Open

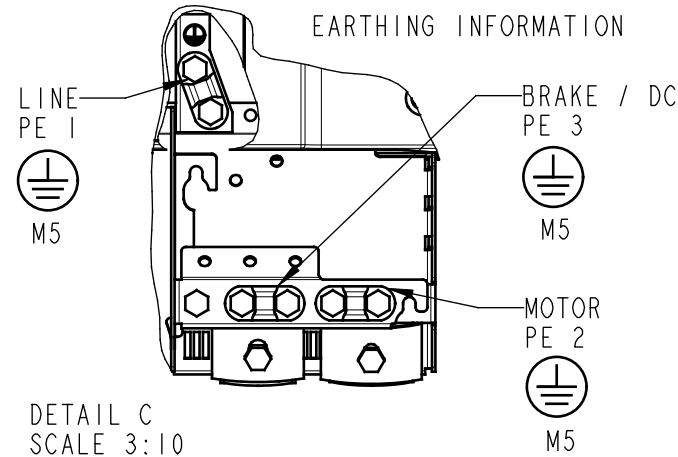

DETAIL C
SCALE 3:10


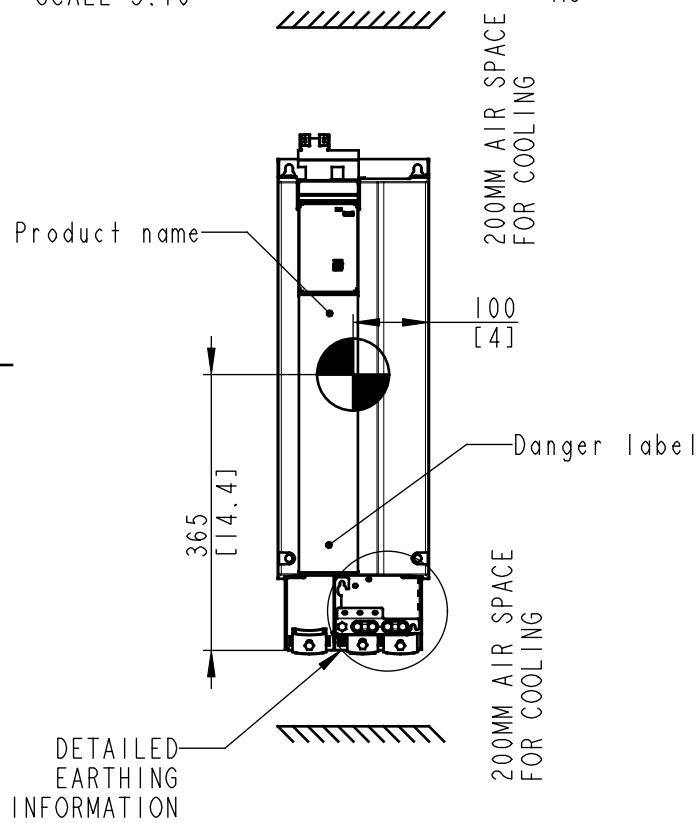


SEE DETAIL C


Position of connectors	
A	Line
B	Motor
C	Brake / DC
D	Interface X0
E	Interface X1/X2

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT.
SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.




CENTER OF GRAVITY:
FOR REFERENCE ONLY, THE PRODUCT CONFIGURATION MAY INFLUENCE THE CG IN ALL THREE AXES.

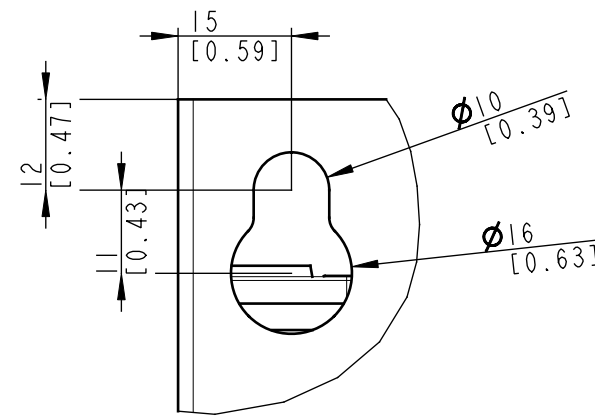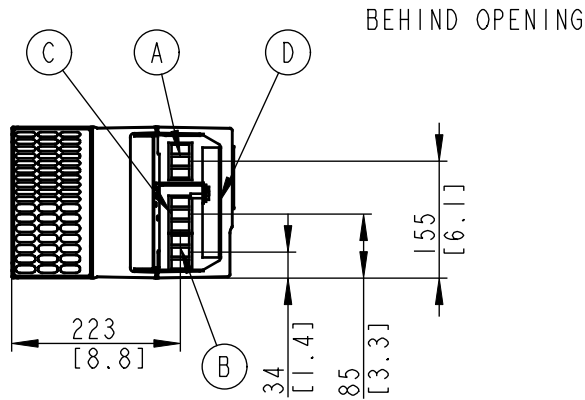


DETAIL A
SCALE 1:1

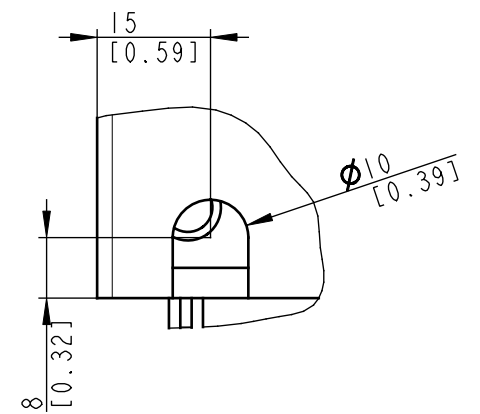

DETAIL B
SCALE 1:1

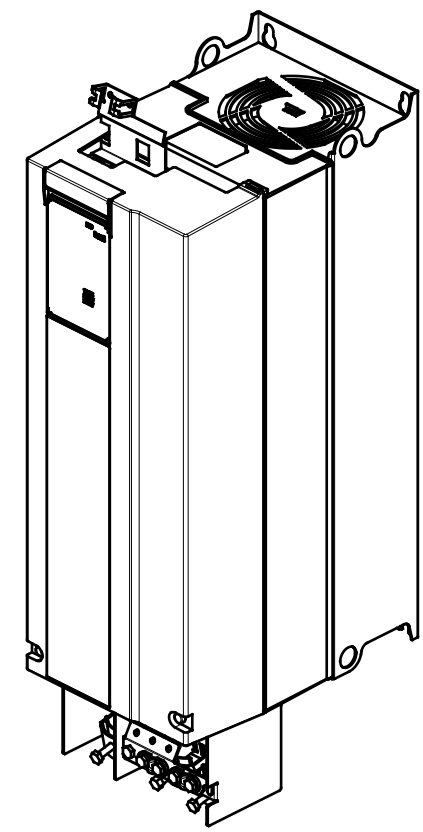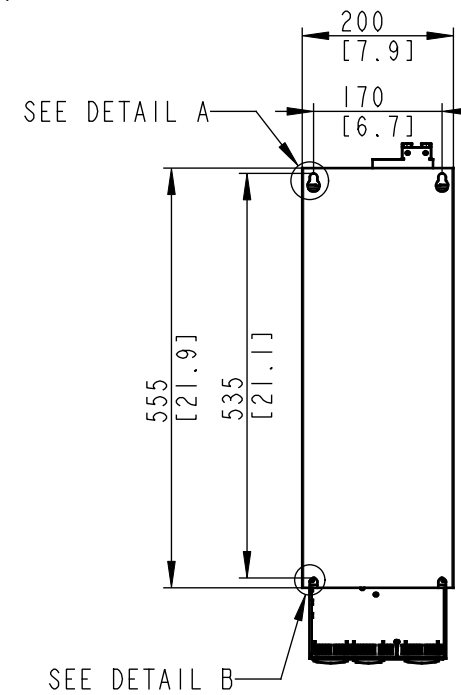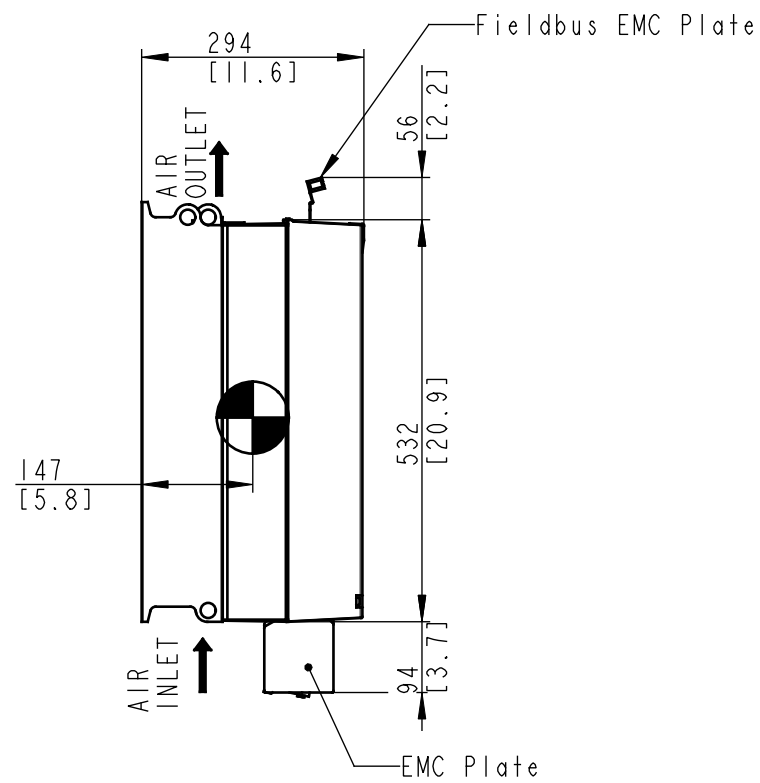

3:20

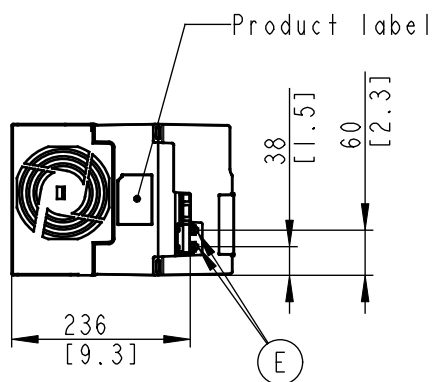

UNLESS OTHERWISE SPECIFIED THE TOLERANCE IS ± 0.4 INCH]. ALL DIMENSIONS ARE IN MILLIMETERS [INCH]			FIRST ANGLE PROJECTION	SCALE 1:10	DRAWING SIZE A3	MATERIAL	
						FINISH	
						DESCRIPTION	
CHANGED						MCAD_FA06_IP20	
DESIGNED	Danfoss	2020-12-14					
CHECKED			PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.			DRAWING NUMBER	
						MCAD_FA06_IP20	
						MODEL	
						MCAD_FA06_IP20	
						REV	
						SHEET	
						1 OF 1	