

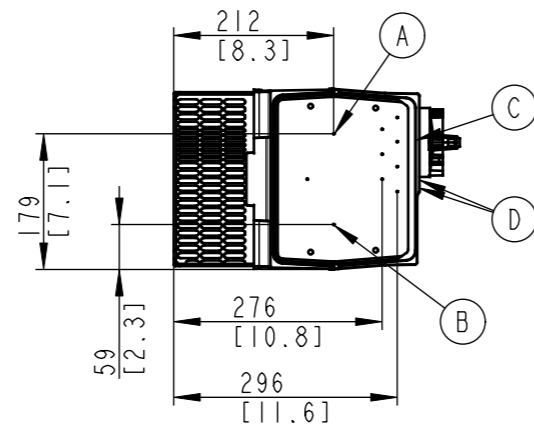
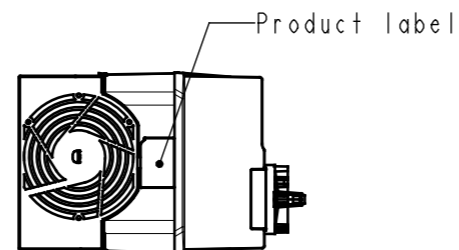
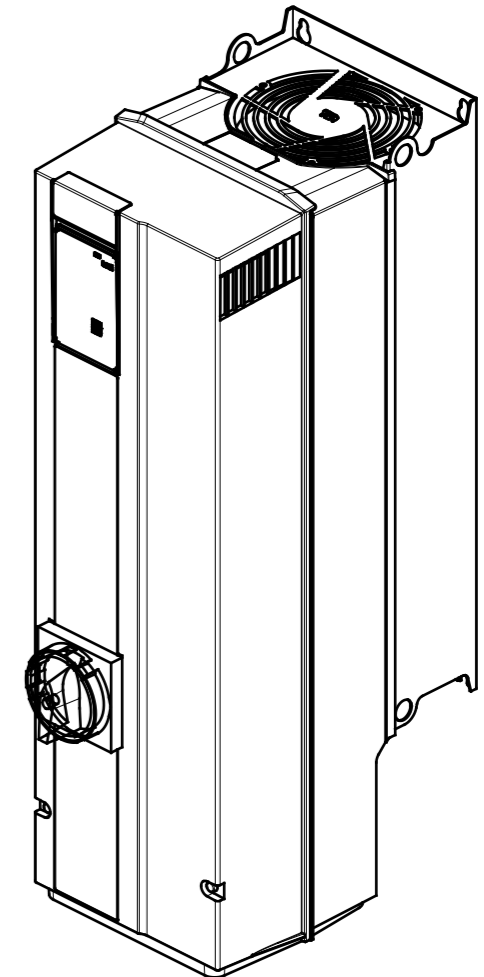
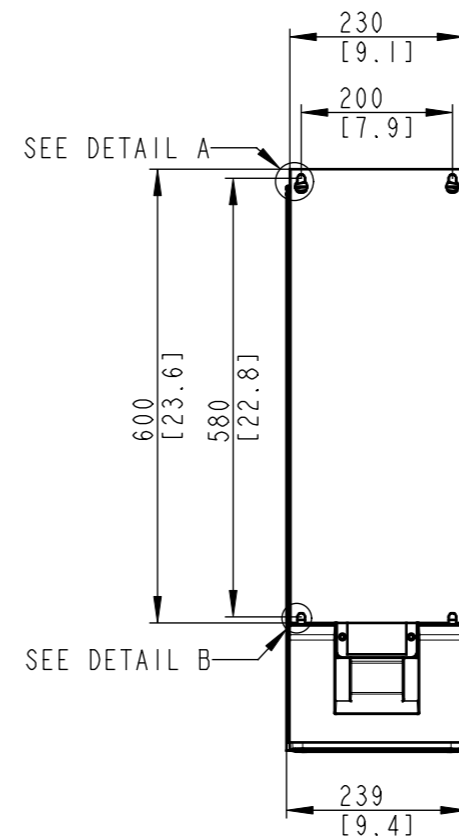
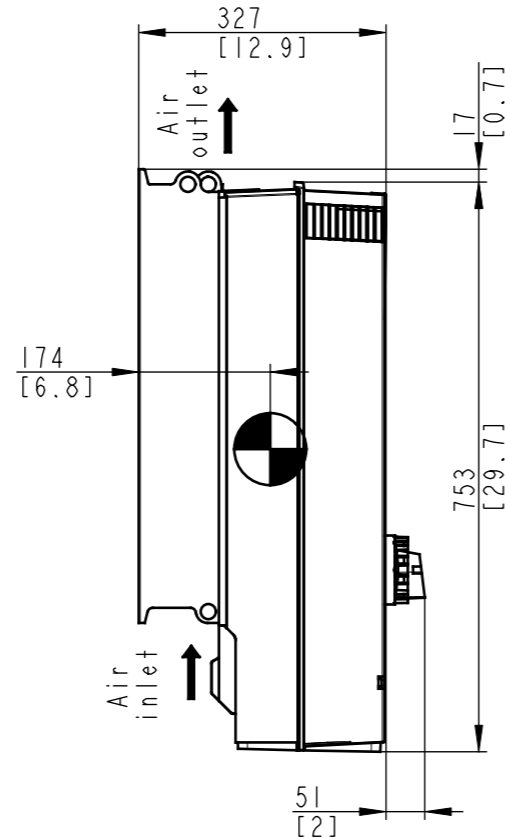
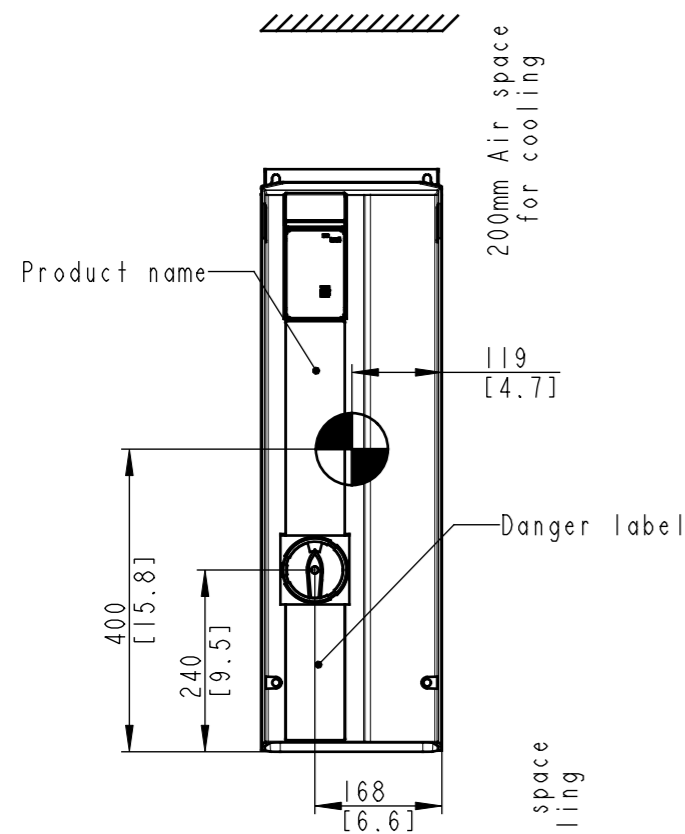


Type	Value
Max Weight	38kg / 84lb
IP Class	IP21
UL Type	Type I

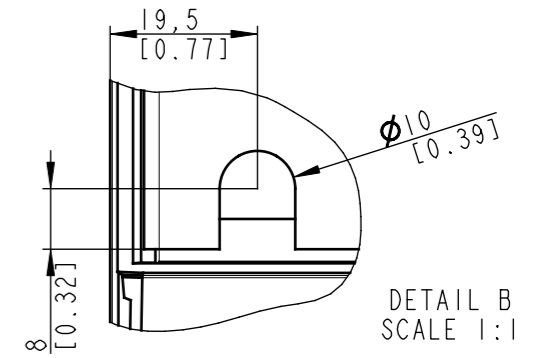

See page 2 for details

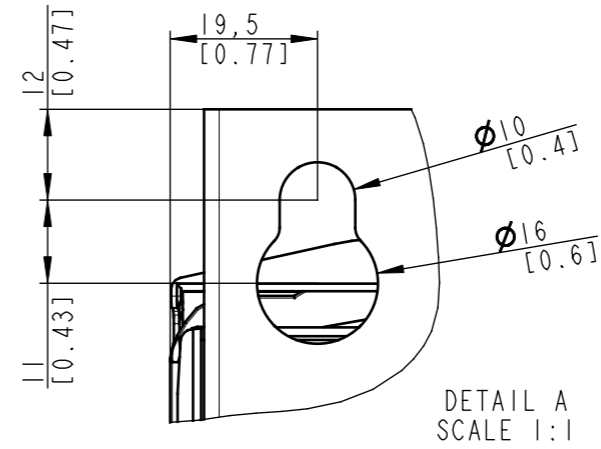


Position of connectors	
A	Line
B	Motor
C	Interface X0
D	Interface XI/X2

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT. SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.





CENTER OF GRAVITY: FOR REFERENCE ONLY, THE PRODUCT CONFIGURATION MAY INFLUENCE THE CG IN ALL THREE AXES.

UNLESS OTHERWISE SPECIFIED THE TOLERANCE IS $\pm 0.4$ MM [0.4 INCH]. ALL DIMENSIONS ARE IN MILLIMETERS [INCH]			FIRST ANGLE PROJECTION	SCALE 1:10	DRAWING SIZE A3	MATERIAL -
						FINISH -
						DESCRIPTION
CHANGED						MCAD FK07 IP21 WITH DISCONNECT
DESIGNED	Kishore	2021-10-08				
CHECKED						
PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.						DRAWING NUMBER
						MCAD FK07 IP21 WITH DISCONNECT
						MODEL
						MCAD FK07 IP21 WITH DISCONNECT
						REV
						SHEET
						1 OF 2

SECTION A-A  
LINE TERMINALS

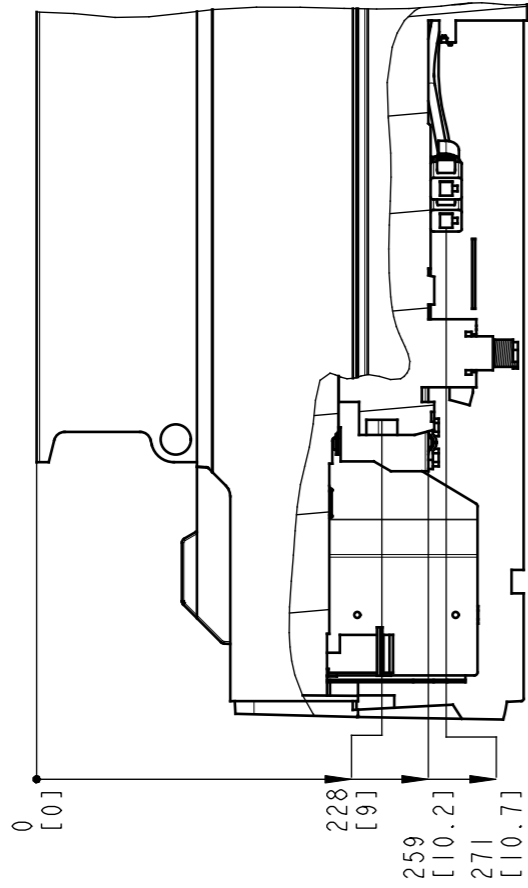

SECTION B-B  
MOTOR TERMINALS

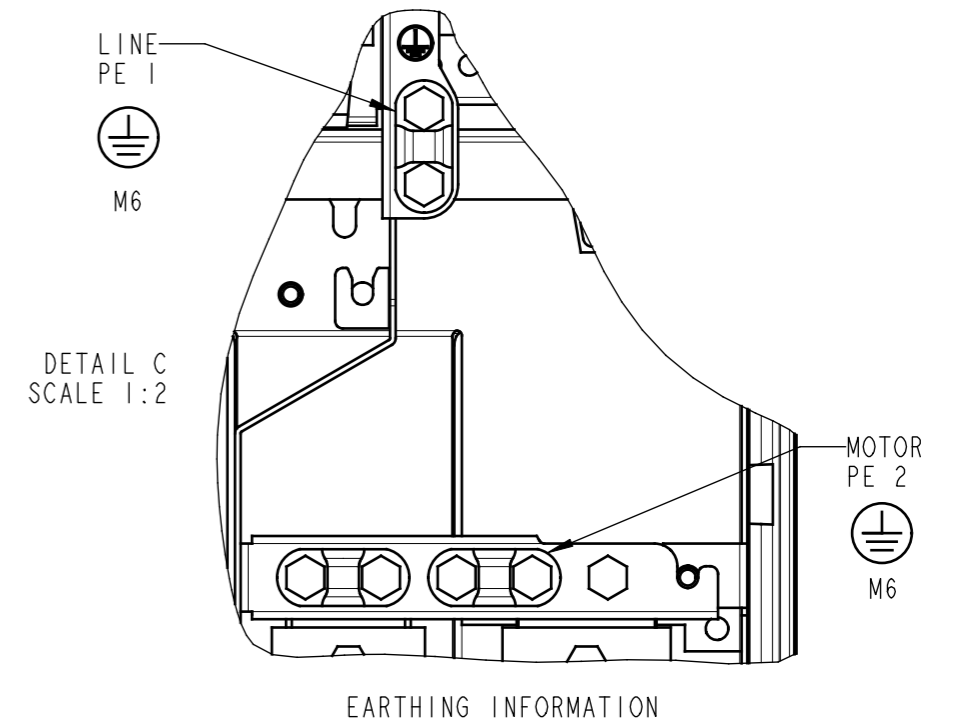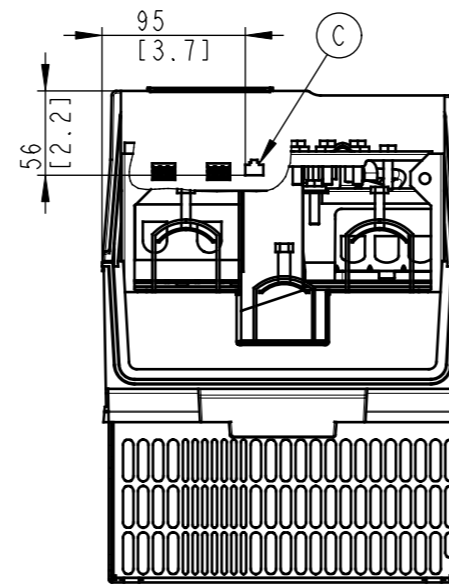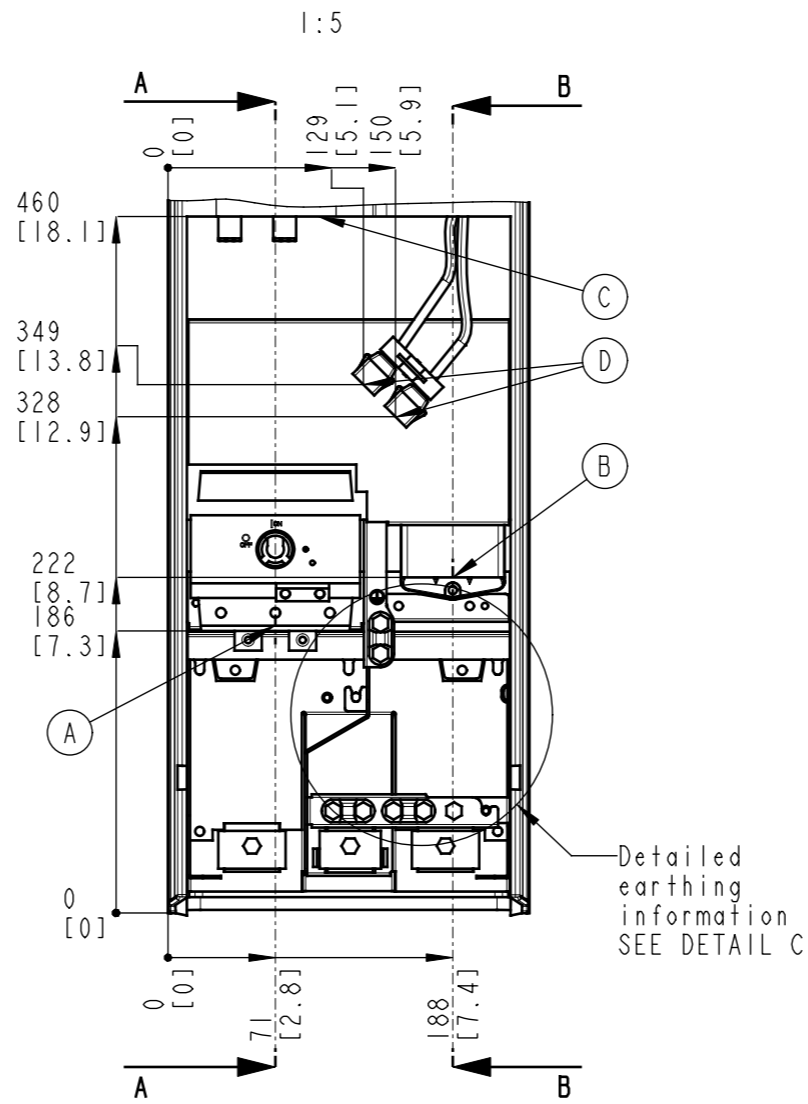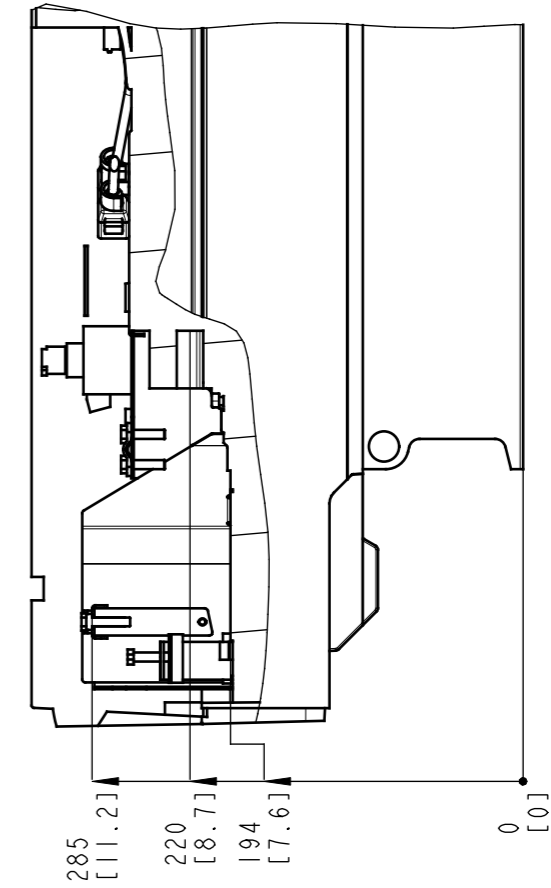

Position of connectors	
A	Line
B	Motor
C	Interface X0
D	Interface XI/X2

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT.  
SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.

PROPERTY OF DANFOSS A/S NORDBOG, DENMARK. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.

DRAWING NUMBER	REV
MCAD FK07 1P21 WITH DISCONNECT	
MODEL	SHEET
MCAD FK07 1P21 WITH DISCONNECT	2 OF 2