



Data Sheet

EM-PMI300-T310

Electric machine, permanent magnet internal

FEATURES

- Synchronous Reluctance assisted Permanent Magnet (SRPM) technology
- Extremely compact and robust aluminum frame structure
- Highest efficiency throughout the operation range on the market (~96 %)
- Liquid cooled with plain water or water/glycol mixture
- Low coolant flow required
- Allowed coolant temperature up to +65°C
- IP65 enclosure class to maximize reliability
- Multiple mounting possibilities

GENERATOR SPECIFIC FEATURES

- Standard SAE flange mounting to match the diesel engine connection
- Wide selection of speed ratings allowing the generator to be selected to customer specific applications with various voltage requirements
- Can be also used as starter motor for the ICE

MOTOR SPECIFIC FEATURES

- Extended speed and torque capabilities compared to standard PM motors from Danfoss reluctance assisted permanent magnet motor technology
- Motor structure is designed to be able to produce high starting torque: EM-PMI motor can produce instantly full torque to a non-rotating shaft
- Optimized speed range to meet the most common gear ratios used in heavy mobile machinery



GENERAL

The machine is developed especially for demanding applications. It is smaller, lighter and more efficient than conventional products on the market.

TYPICAL APPLICATIONS

- Generator for diesel-electric/serial hybrid applications
- Traction/propulsion motor
- Generator/Motor for parallel hybrid applications

SPECIFICATIONS

General electrical properties		Torsional stiffness of shaft drive end	4 Nm/rad (from middle of the d-end spline to rotor air gap)
Nominal voltage (line to line)	500 V _{AC}	Rotating mass	40 kg
Voltage stress	IEC 60034-25, Curve A: Without filters for motors up to 500 V _{AC}	Maximum static torque range on the shaft, max. 25000 cycles, R=0 (*)	3300 Nm
Nominal efficiency	96 %	Maximum dynamic torque range on the shaft, max. 1e6 cycles, R=0 (*)	2200 Nm
Pole pair number	6	Maximum allowed vibratory torque range, 1e9...1e10 cycles (*)	0,3 x Nominal torque of machine
Power supply	Inverter fed.	Maximum deceleration (fault stop)	12400 rad/s ²
Nominal inverter switching frequency	8 kHz	Dimensions	
Minimum inverter switching frequency	4 kHz (with limited speed 1.4 times nominal speed)	Length (frame)	377 mm
Basic information		Diameter (frame)	408 mm
Machine type	Synchronous reluctance assisted permanent magnet	Cooling	
Frame material	Aluminum	Cooling liquid	Plain water with appropriate corrosive inhibitor (max. 50 % corrosive inhibitor)
Mounting direction	Can be used in any direction, see user guide for details. Greased for life bearings required	Cooling liquid corrosive inhibitor type	Ethylene glycol Glysantin G48 recommended
Mounting (IEC 60034-7)	IM 3009-B5 (Flange horizontal), IM 3019-V1 (Flange and D-end down)	Cooling method (IEC 60034-6)	IC 71 W
Standard Flange D-end (SAE J617)	SAE 4 mating transmission housing	Minimum cooling liquid flow	10 l/min
Standard axle spline D-end	DIN5480 W50x2x24x8f, shaft length 75mm	Coolant circuit capacity	0.65 l
Bearing type	Standard: 6211-2RS1/C3WT +BHS option: 6211/C3 (with LGHP2 grease) +BIN option: D-end: 6211-2RS1/C3WT, N-end: 6211-2RS1/HC5C3WT +BIA option: 6211-2RS1/HC5C3WT +BHS+BIN options: D-end: 6211/C3 (with LGHP2 grease), N-end: 6211/HC5C3WT (with LGHP2 grease) +BHS+BIA options: 6211/HC5C3 (with LGHP2 grease)	Maximum operating pressure	3 bar
Standard rotation direction	Clockwise (both directions possible)	Pressure loss	0.1 bar with 10l/min (+25°C coolant)
Protection class	IP65 Following best design principles	Nominal cooling liquid temperature	+65°C (derating required if exceeded)
Duty type (IEC 60034-1)	S1/S9	Minimum cooling liquid temperature	-20°C
Standard color	Dark grey RAL7024 powder coating	Maximum cooling liquid temperature	+70°C
Mechanical		Condensation dew point	Please use anti-condensation heaters
Total weight	125 kg (no options)	Temperature rating	
Moment of inertia	0.21 kgm ²	Insulation class (IEC 60034-1)	F (155°C)
		Temperature rise (IEC 60034-1)	85°C
		Maximum winding temperature	150°C

Nominal ambient temperature	+65°C / +45°C with +CL option
Min. ambient temperature	-40°C
Nominal altitude (IEC 60034-1)	1000 m
Connections	
Coolant connection	2 x G3/4 bore
Cable direction	Standard cable direction towards D-end
HV cables	3 x 50 mm ² max.
HV cable glands	Pflitsch blueglobe TRI bg 225ms tri
HV cable	Recommended H+S Radox screened cable
HV cable lug size	35-8, 50-8
Recommended cable lug	35 mm ² : Druseidt with narrow flange 03901 50 mm ² : Druseidt with narrow flange 03903
HV connection boxes	1 x 3 phase box
LV connector	12 pin TE HDSCS
LV connector type	TE 1-1564520-1
LV connector pin type	Gold plated
LV mating connector type	TE 1-1703639-1
LV mating connector pin type	TE 1241380-2 (Gold plated)
LV connector pin configuration	See Table below
LV connections (+LVB1 option)	Connection box with 2x M25 cable glands (reserve 2x plugged M16 threads available) and terminal block for LV connections. See Table below
Anti-condensation heater (+HEAT1 option)	65 W 230 V _{AC} single phase heater resistor (requires +LVB1 option)

(* The values are based on structural analysis and they are not applicable to any marine class rules or requirements.


PIN	Description
1	Resolver, RES_COSN
2	Resolver, RES_SINN
3	Resolver, EXCN
4	Temperature, PT100, windings
5	Temperature, PT100, windings
6	Temperature, PT100, windings
7	Resolver, RES_COSP
8	Resolver, RES_SINP
9	Resolver, EXCP
10	Temperature, PT100, windings GND
11	Temperature, PT100, windings GND
12	Temperature, PT100, windings GND

Table 1 Pin configuration of LV-connector

PIN	Description
1	Temperature 1, PT100 (P), windings
2	Temperature 1, PT100 (N), windings
3	Temperature 2, PT100 (P), windings
4	Temperature 2, PT100 (N), windings
5	Temperature 3, PT100 (P), windings
6	Temperature 3, PT100 (N), windings
7	Temperature 4, PT100 (P), windings (+TEMP4 option)
8	Temperature 4, PT100 (N), windings (+TEMP4 option)
9	Temperature 5, PT100 (P), windings (+TEMP4 option)
10	Temperature 5, PT100 (N), windings (+TEMP4 option)
11	Temperature 6, PT100 (P), windings (+TEMP4 option)
12	Temperature 6, PT100 (N), windings (+TEMP4 option)
16	Heater, phase, 230 V _{AC}
17	Heater, neutral
⊥	Heater, ground / protective earth, M4 screw inside connection box
⊥	General shielding, ground / protective earth, M4 screw inside connection box
18	Resolver, RES_COS_N, in-built non-contacting
19	Resolver, RES_COS_P, in-built non-contacting
20	Resolver, RES_SIN_N, in-built non-contacting
21	Resolver, RES_SIN_P, in-built non-contacting
22	Resolver, EXCN, in-built non-contacting
23	Resolver, EXCP, in-built non-contacting

Table 2 Pin configuration of LV connections (+LVB1 option)

PRESSURE LOSS VS COOLANT FLOW

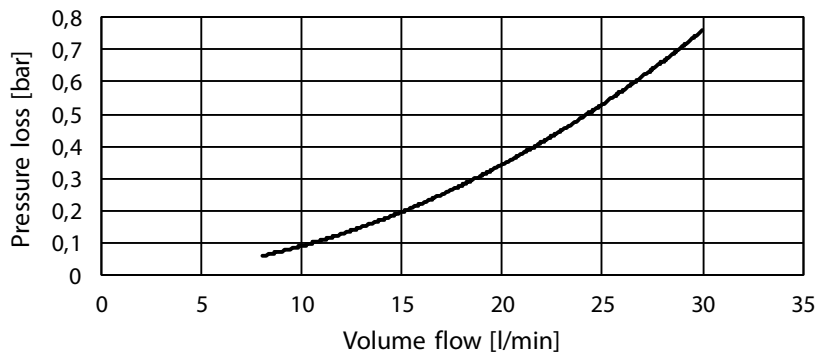

Picture 1 Pressure loss vs coolant flow

MOTORS

Type	Coolant temperature +65°C			Coolant temperature +40°C			Coolant temperature +40 / +65°C		
	Cont. Torque [Nm]	Cont. Power [kW]	Nom. Current [A]	Cont. Torque [Nm]	Cont. Power [kW]	Nom. Current [A]	Nom. speed [rpm]	Max. speed [rpm]	Peak torque (*)
EM-PMI300-T310-1100	353	41	54	399	46	64	1100	2200	700
EM-PMI300-T310-1300	353	48	63	398	54	73	1300	2600	700
EM-PMI300-T310-1600	351	59	78	389	65	90	1600	3200	700
EM-PMI300-T310-2200	345	79	105	390	90	121	2200	4000	700
EM-PMI300-T310-2800	312	91	123	369	108	148	2800	4000	700
EM-PMI300-T310-3200	279	94	125	338	113	149	3200	4000	700

(* Peak torque achieved with one (350A) inverter

The maximum allowed peak torque duration at stator winding starting temperature +90°C is 2 minutes. The given values indicate typical duration and are not verified. In case more accurate values are required, cyclic dimensions are needed.

GENERATORS

Type	Coolant temperature +65°C			Coolant temperature +40°C			Coolant temperature +40 / +65°C			
	Apparent power [kVA]	Cont. power [kW]	Nom. Current [A]	Apparent power [kVA]	Cont. Power [kW]	Nom. Current [A]	Nom. speed [rpm]	Nom. Freq. [Hz]	Power factor	Volt/ speed ratio [V/rpm] (***)
EM-PMI300-T310-1100	44	44	52	49	49	58	1200	113	0.91	0.498
EM-PMI300-T310-1300	53	53	62	61	61	71	1400	134	0.91	0.415
EM-PMI300-T310-1600	65	65	75	72	72	85	1700	165	0.90	0.332
EM-PMI300-T310-2200	86	86	100	100	100	116	2300	227	0.91	0.249
EM-PMI300-T310-2800	103	102	120	120	119	139	2900	288	0.89	0.194
EM-PMI300-T310-3200	124	124	145	145	145	168	3200	330	0.89	0.166

(*** Back EMF for cold (20°C) generator

PRODUCT CODE AND OPTIONS

Use product code including all needed options for ordering. Standard options are not given with the code as they are selected by default if a non-standard option is not selected. Standard options are indicated by a star (*).

Product code	Description
EM-PMI300-T310-1600	Standard 1600 rpm unit with standard options
EM-PMI300-T310-1600+BHS+RES1	Standard unit with grease lubricated bearings and resolver

Table 3 Product code examples


Variant	Code	Description	Additional information
Low voltage connections	*	Low voltage connections done with connector	TYCO TE 1-1564520-1 connector for LV connections
	+LVB1	Low voltage connections done with connection box and terminal strip	Connection box with 2x M25 cable glands (reserve 2x plugged M16 threads available) and terminal block for LV connections
N-end attachment	*	None	
	+NE1	Flange	SAE 4 mating transmission housing
	+NE2	Male shaft + Flange	DIN5480 W50x2x24x8f + SAE 4 mating transmission housing
Bearing lubrication and mounting direction	*	Greased for life	Deep groove ball bearing, contact seal on both sides, any mounting direction (see user guide for details)
	+BHS	Grease lubricated	Deep groove ball bearing, open design, horizontal mounting direction (see user guide for details)
Bearing insulation	*	Non-insulated bearings	Non-insulated bearings
	+BIN	Insulated bearing in N-end	Insulated bearing in N-end
	+BIA	Insulated bearing in both ends	Insulated bearing in both ends
Rotation sensor	*	None	No resolver
	+RES1	Resolver	In-built non contacting resolver, 6-pole pair
Winding temperature sensors (**)	*	Temperature surveillance	3 x PT100 (two wire) in windings
	+TEMP4	Redundant temperature surveillance	6 x PT100 (two wire) in windings (requires +LVB1 option)
Anti-condensation heaters	*	None	
	+HEAT1	One anti-condensation heater	230 V _{AC} / 65 W (requires +LVB1 option)
Marine classification	*	No marine classification	
	+CL1		ABS American Bureau of Shipping
	+CL2		BV Bureau Veritas
	+CL3		DNV GL DNV GL AS
	+CL4		LR Lloyd's Register
	+CL5		RINA

(* Standard option

(** Winding temperature sensors are for stator winding. The selection of high voltage connections does not have an influence on the quantity of PT100 elements.

Table 4 Option list

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

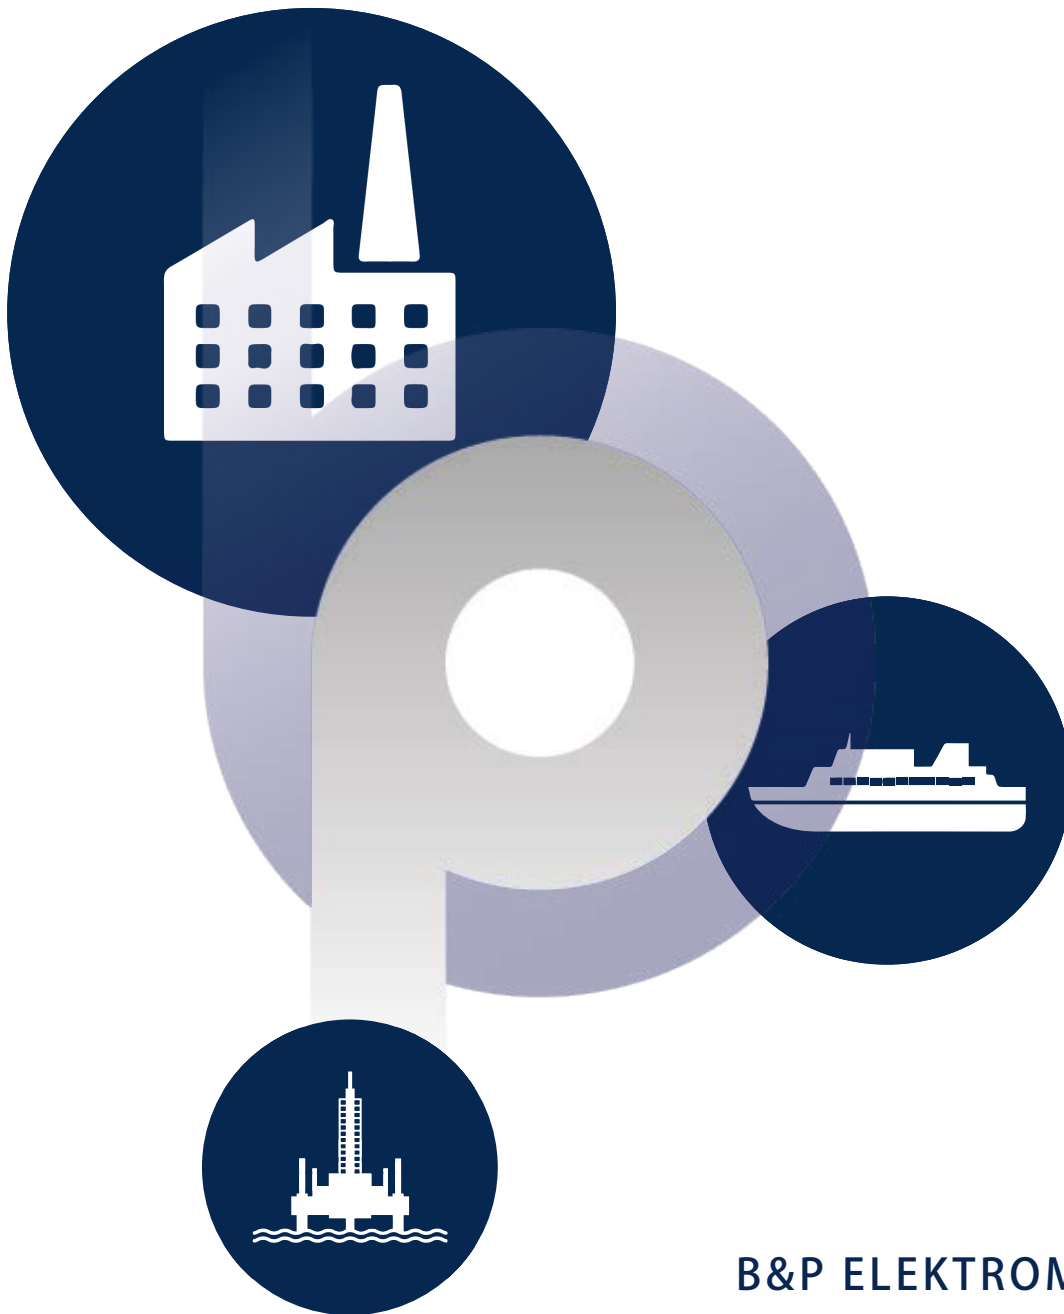

B&P ELEKTROMOTOREN BV

Ampèrestraat 8F
4004 KB Tiel

info@bnpelektromotoren.nl

+31 (0)344 616 267

BTW nr. NL819113918B01

KvK nr. 30237800

ING Bank NL60 INGB 0675 304 792



www.bnpelektromotoren.nl